


PETIT FLUTE

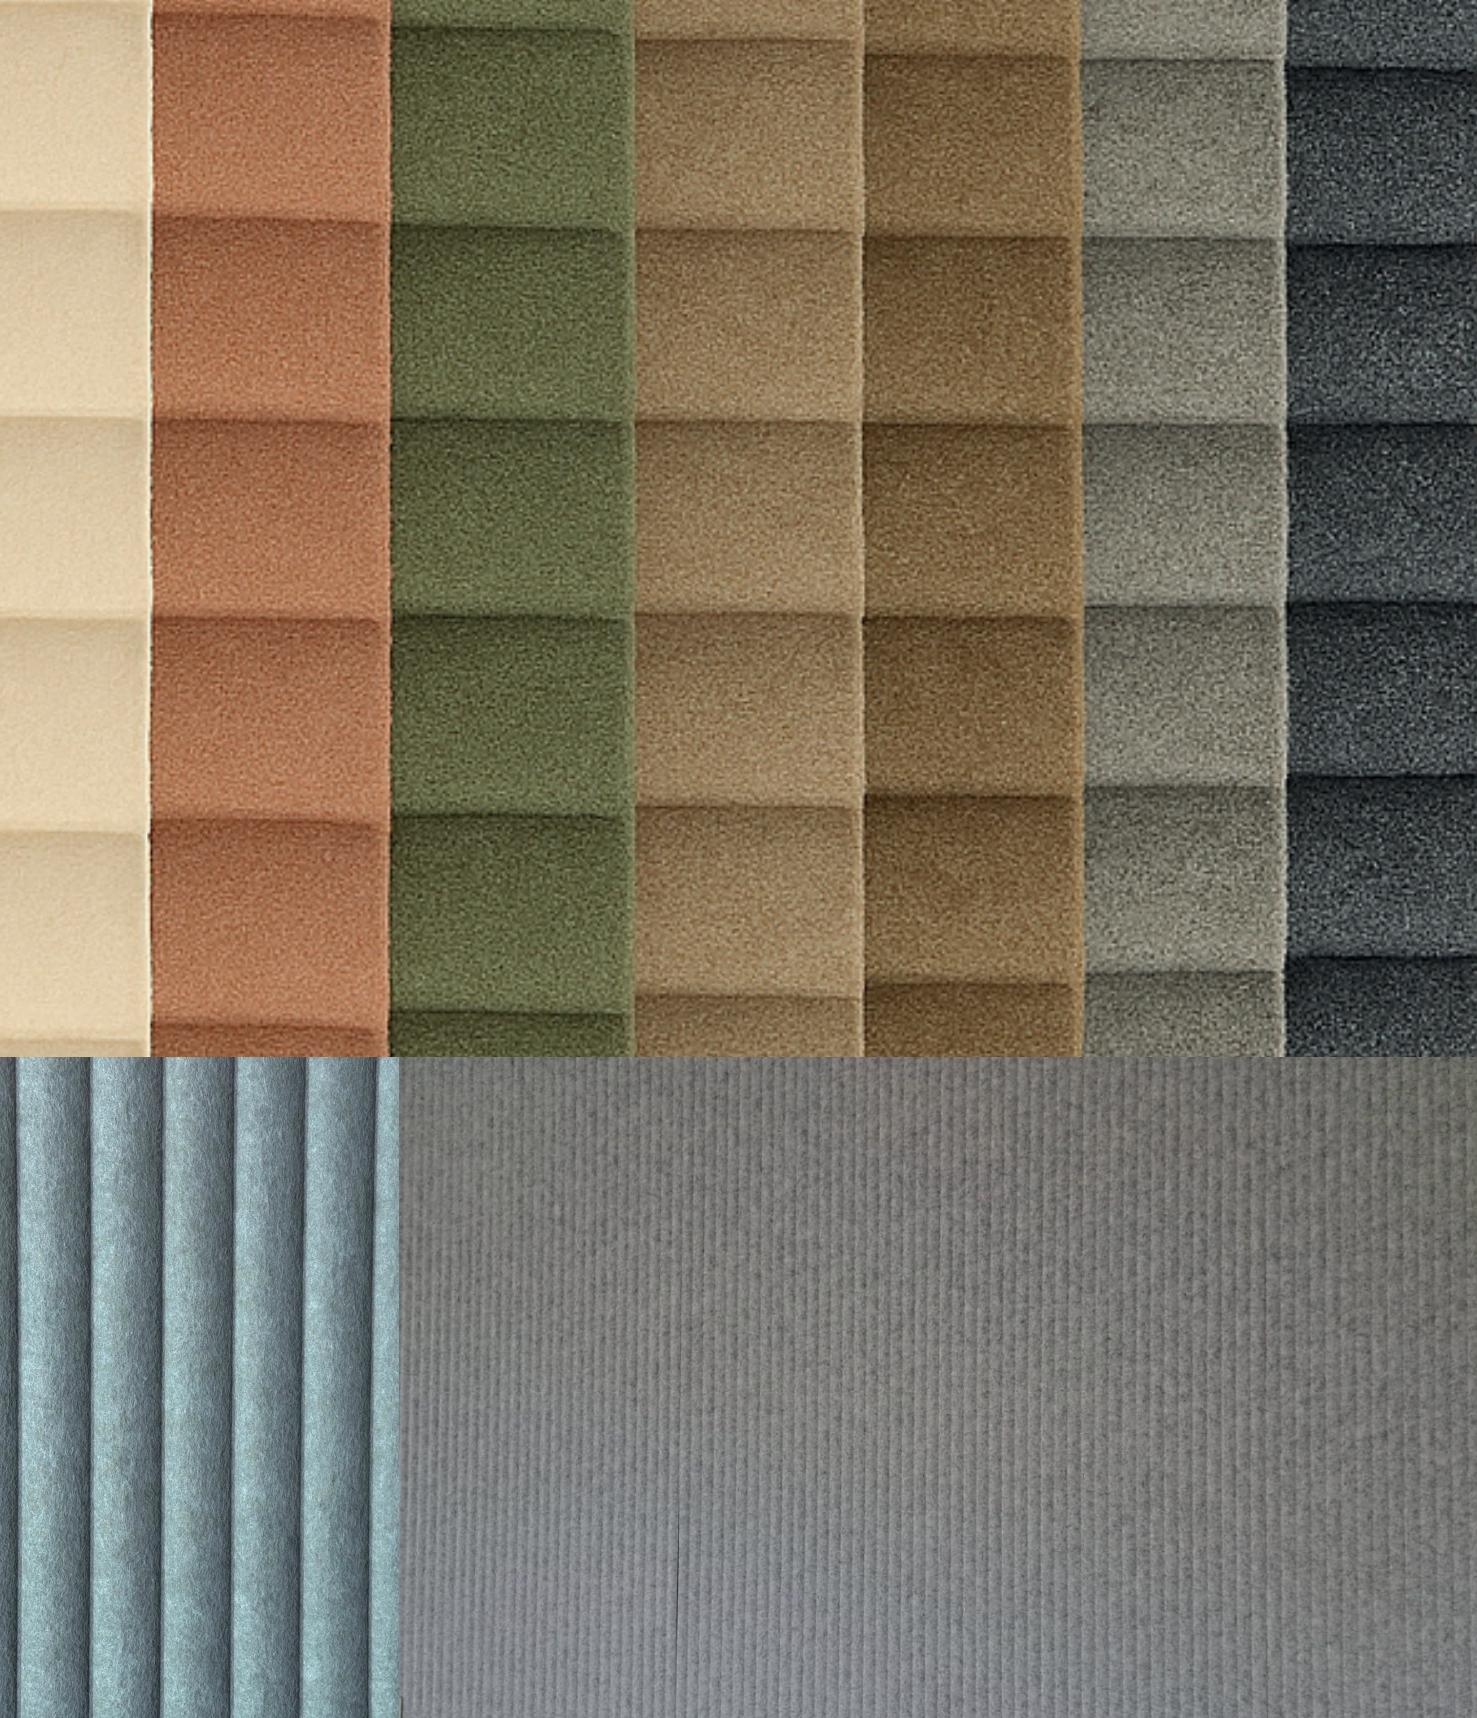


For technical support or further advice, contact:
hello@lumii.design | +44 (0)1273 750 240

lumii


DISCLAIMER

This guide is provided in good faith to assist in installation. It is not intended as a complete or prescriptive method. Lumii Design accepts no responsibility for results due to variations in site conditions, handling or application. All health and safety standards must be observed.

PETIT FLUTE COLOURS

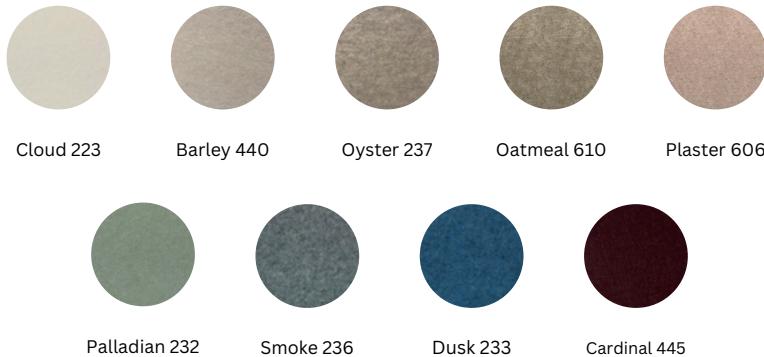

SCHEMATIC

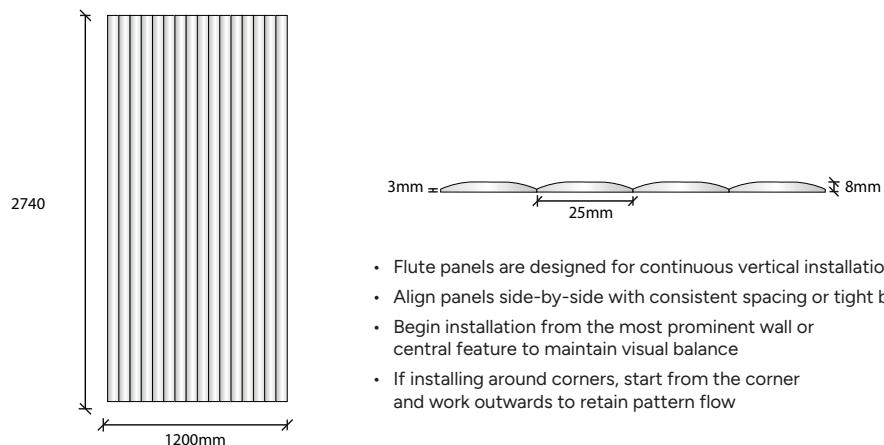

- Flute panels are designed for continuous vertical installation
- Align panels side-by-side with consistent spacing or tight butt joins
- Begin installation from the most prominent wall or central feature to maintain visual balance
- If installing around corners, start from the corner and work outwards to retain pattern flow

PETIT FLUTE SPECIFICATIONS

COMPOSITION 100% PET (75% Post Consumer Recycled Waste, 25% Polyester Felt)	COLOURS Available in any 12mm colour, with 9 UK-stocked shown above
DIMENSIONS 2740mm (+/- 3mm) x 1200mm (+/- 3mm) Thickness: 8mm (+/-0.5mm) Weight: 8kg	FIRE & HEAT Fire retardant: EN 13501-1: 2018 Classification B-s1, d0 P Melting Point 250°C Max. Recommended Service Temp: Up to 80°C

Miixfelt™ ACOUSTIC RESULTS	Aw Class E. 0.25 (50mm air gap) Class C. 0.65 (50mm air gap) Class A 0.90 (100mm air gap) Class A. 0.95 (200mm air gap)	AS Coefficient @ 2000 Hz 0.85 (0mm air gap) 1 (50mm air gap) 1* (100mm air gap) 1 (200mm air gap)	SAA (NRC) 0.41 (0mm air gap) 0.76 (50mm air gap) 0.87 (100mm air gap) 0.92 (200mm air gap)
-----------------------------------	--	--	---

For technical support or further advice, contact:
hello@lumii.design | +44 (0)1273 750 240

DISCLAIMER

This guide is provided in good faith to assist in installation. It is not intended as a complete or prescriptive method. Lumii Design accepts no responsibility for results due to variations in site conditions, handling or application. All health and safety standards must be observed.

MADE IN BRITAIN

