

CEILING BAFFLES

# RUSTLE



Rustle is a layered ceiling baffle system inspired by overlapping fallen leaves. Its staggered blades create a richly textured ceiling that looks beautiful from every angle while enhancing acoustic comfort. Ideal for workplaces, education settings and public interiors wanting a natural, tactile design overhead.

For technical support or further advice, contact:  
[hello@lumii.design](mailto:hello@lumii.design) | +44 (0)1273 750 240

**lumii**

**DISCLAIMER**


This guide is provided in good faith to assist in installation. It is not intended as a complete or prescriptive method. Lumii Design accepts no responsibility for results due to variations in site conditions, handling or application. All health and safety standards must be observed.

# COLOURS

12mm Miixfelt™



# SCHEMATIC

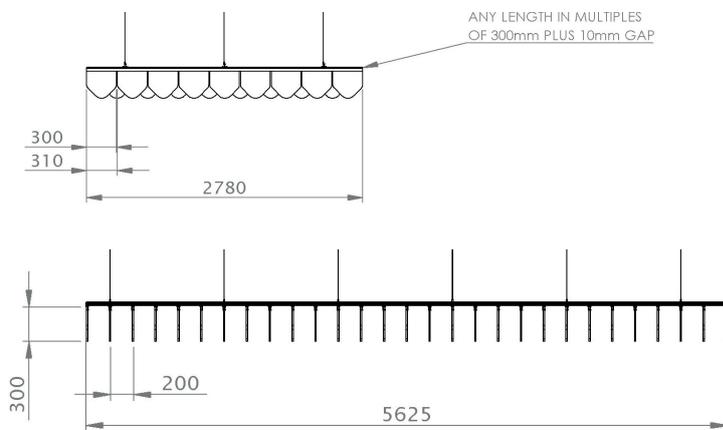

- **Layered, Shingle-Inspired Design** – Overlapping blades evoke beach shingles, adding depth and visual texture.
- **360° Visual Appeal** – A sculptural ceiling that looks striking from all viewpoints.
- **Customisable Layout** – Blade size, overlap and spacing can be tailored to project requirements.
- **Acoustic Performance** – Made from recycled Miixfelt™ PET to absorb sound effectively.
- **Sustainable Choice** – Miixfelt™ is low-VOC, recyclable and third-party verified to support sustainability goals.

# SPECIFICATIONS



## COMPOSITION

100% PET (75% Post Consumer Recycled Waste, 25% Polyester Felt)  
Chemical Entity: Polyester Fibre from PET (Polyethylene Terephthalate).



## COLOURS

37 UK stocked / 50 more colours available  
Lead times and MOQ's apply  
Light fastness: 6-7 Excellent



## DIMENSIONS

Size mm Weight kg  
1200 - 1216 16kg



## FIRE & HEAT

**Fire retardant:**  
EN 13501-1: 2018 Classification B-s1, d0 P  
Melting Point 250°C Max.  
**Recommended Service Temp:** Up to 80°C



## MIIXFELT™ ACOUSTIC RESULTS

**Aw**  
0.5 (0mm air gap)  
Class D. 0.85 (50mm air gap)  
Class B. 1 (100mm air gap)  
Class A. 1 (200mm air gap)

**AS Coefficient @ 2000 Hz**  
1 (0mm air gap)  
1 (50mm air gap)  
1 (100mm air gap)  
1 (200mm air gap)

**SAA (NRC)**  
0.7 (0mm air gap)  
0.89 (50mm air gap)  
0.94 (100mm air gap)  
0.97 (200mm air gap)

For technical support or further advice, contact:  
[hello@lumii.design](mailto:hello@lumii.design) | +44 (0)1273 750 240

**lumii**

### DISCLAIMER

This guide is provided in good faith to assist in installation. It is not intended as a complete or prescriptive method. Lumii Design accepts no responsibility for results due to variations in site conditions, handling or application. All health and safety standards must be observed.

