


CEILING BAFFLES

# PITCH

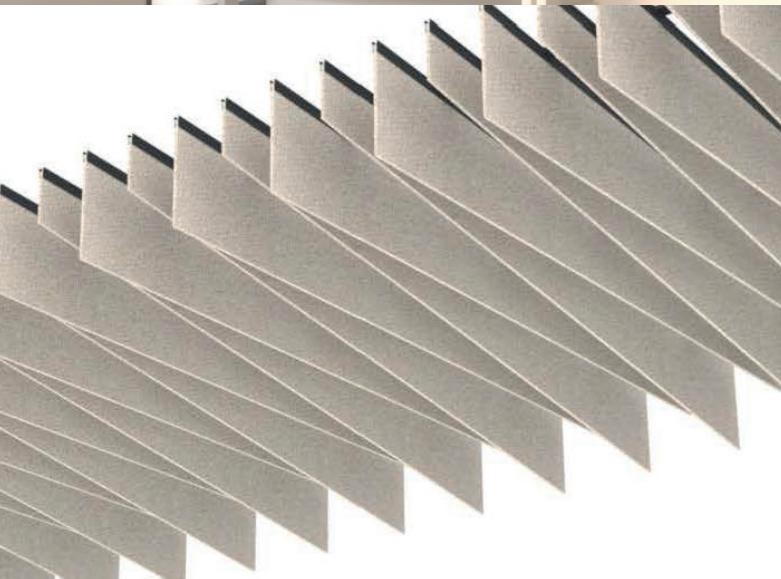

Pitch is a dynamic ceiling baffle system featuring alternating diagonal-cut blades. This distinctive layout breaks up the ceiling plane with angled rhythm and movement, delivering a bold architectural statement as well as excellent acoustic control. Each blade can be tailored to suit project depths and spacing, making Pitch ideal for workplaces, education settings and public interiors where design energy and sound absorption are equally important.


For technical support or further advice, contact:  
[hello@lumii.design](mailto:hello@lumii.design) | +44 (0)1273 750 240

DISCLAIMER


This guide is provided in good faith to assist in installation. It is not intended as a complete or prescriptive method. Lumii Design accepts no responsibility for results due to variations in site conditions, handling or application. All health and safety standards must be observed.

**lumii**

# COLOURS

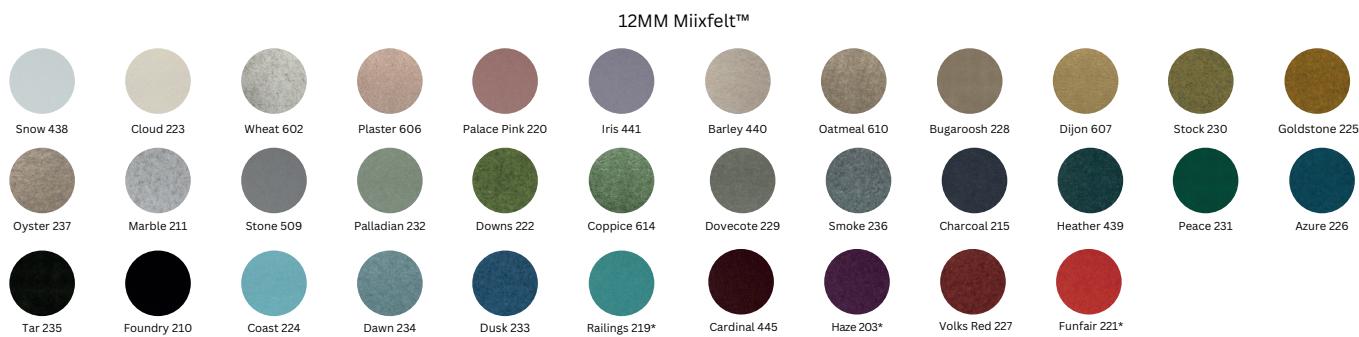

# SCHEMATIC

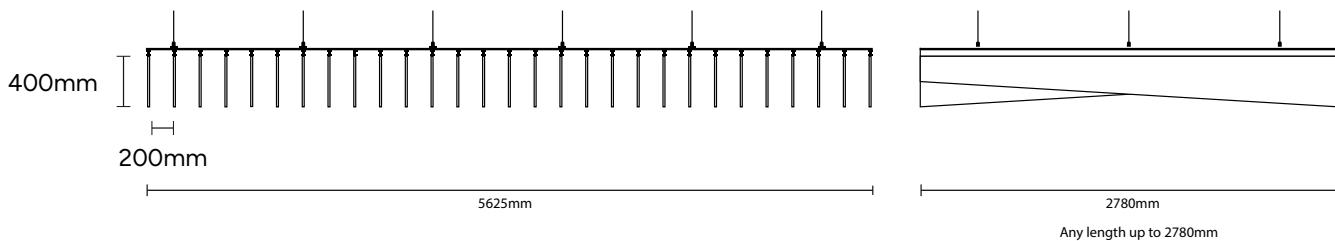

- Dynamic Angled Design** – Alternating diagonal-cut blades create movement and rhythm across the ceiling.
- Customisable Dimensions** – Blade depth, spacing and layout can be tailored to suit any project.
- High Acoustic Performance** – Made from recycled Miixfelt™ PET to absorb sound effectively in open spaces.
- Architectural Impact** – Adds energy and visual interest while maintaining a refined, contemporary look.
- Sustainable & Low-VOC** – Miixfelt™ is recyclable and third-party verified to support sustainability goals.
- Steel powder coated mat black extrusion.

# SPECIFICATIONS

|  |  |
|--|--|
|  <b>COMPOSITION</b><br>100% PET (75% Post Consumer Recycled Waste, 25% Polyester Felt)<br>Chemical Entity: Polyester Fibre from PET (Polyethylene Terephthalate). |  <b>COLOURS</b><br>34 UK stocked/ 50 more Colours Available<br>Lead times and MOQ's apply<br>Light fastness: 6-7 Excellent  |
|  <b>DIMENSIONS</b><br>Size mm      Weight kg<br>1200 - 1216      16kg   |  <b>FIRE &amp; HEAT</b><br><b>Fire retardant:</b><br>EN 13501-1: 2018 Classification B-s1, d0 P<br>Melting Point 250°C Max.<br>Recommended Service Temp: Up to 80°C |

|   |  |  |  |
|---|--|--|--|
|  <b>MIIXFELT™ ACOUSTIC RESULTS</b> | <b>Aw</b><br>0.5 (0mm air gap)<br>Class D. 0.85 (50mm air gap)<br>Class B. 1 (100mm air gap)<br>Class A. 1 (200mm air gap) | <b>AS Coefficient @ 2000 Hz</b><br>1 (0mm air gap)<br>1 (50mm air gap)<br>1 (100mm air gap)<br>1 (200mm air gap) | <b>SAA (NRC)</b><br>0.7 (0mm air gap)<br>0.89 (50mm air gap)<br>0.94 (100mm air gap)<br>0.97 (200mm air gap) |
|---|--|--|--|

For technical support or further advice, contact:  
[hello@lumii.design](mailto:hello@lumii.design) | +44 (0)1273 750 240

## DISCLAIMER

This guide is provided in good faith to assist in installation. It is not intended as a complete or prescriptive method. Lumii Design accepts no responsibility for results due to variations in site conditions, handling or application. All health and safety standards must be observed.

 **MADE IN BRITAIN**®

