

V-Grooved Wall Panels

DOME

THE ART DECO COLLECTION



Infused with a perfect fusion of sustainability, acoustic performance, and artistic flair, our acoustic wall panels transform any space into a visually striking masterpiece while effectively reducing reverberation. Elevate your environment with Lumii's moulded acoustic wall panels and experience the exceptional blend of style and functionality they bring to your interiors.

For technical support or further advice, contact:
hello@lumii.design | +44 (0)1273 750 240

lumii

DISCLAIMER


This guide is provided in good faith to assist in installation. It is not intended as a complete or prescriptive method. Lumii Design accepts no responsibility for results due to variations in site conditions, handling or application. All health and safety standards must be observed.

DOME COLOURS



18mm & 24mm consist of x2 bonded Miixfelt™ sheets, using specialist glue to avoid a reduction in the acoustic efficiency.

SCHEMATIC

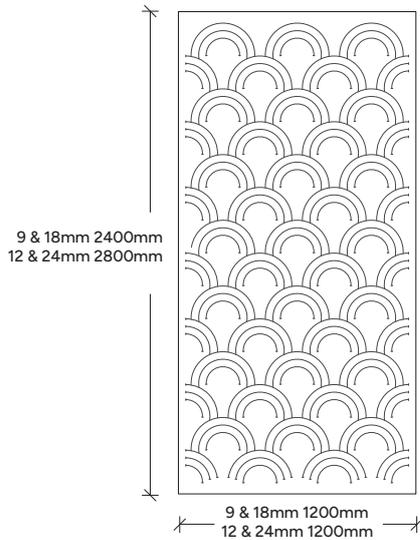

Dome evokes the grand arches and domed ceilings of the Art Deco era. Curved grooves cut with exacting precision bring sculptural softness and acoustic clarity. Available in 9, 12, 18 and 24 mm thicknesses and in 140 colours (52 stocked in the UK).



Custom spacing, angles and depths are available on request. Custom sizes can be cut on request.

DOME SPECIFICATIONS

 <p>COMPOSITION 100% PET (50% Post Consumer Recycled Waster 50% Polyester Felt) Chemical Entity: Polyester Fibre from PET (Polyethylene Terephthalate).</p>	 <p>COLOURS ALL colours available in the V Groove range on all panels Lead times and MOQ's apply Light fastness: 6-7 Excellent</p>															
 <p>DIMENSIONS</p> <table border="1"> <thead> <tr> <th>Thickness (mm)</th> <th>Size mm</th> <th>Weight kg</th> </tr> </thead> <tbody> <tr> <td>9 mm</td> <td>2400 x 1200</td> <td>5.7kg</td> </tr> <tr> <td>18mm</td> <td>2400 x 1200</td> <td>11.4kg</td> </tr> <tr> <td>12mm</td> <td>2800 x1200</td> <td>8kg</td> </tr> <tr> <td>24mm</td> <td>2800 x1200</td> <td>16kg</td> </tr> </tbody> </table>	Thickness (mm)	Size mm	Weight kg	9 mm	2400 x 1200	5.7kg	18mm	2400 x 1200	11.4kg	12mm	2800 x1200	8kg	24mm	2800 x1200	16kg	 <p>FIRE & HEAT Fire retardant: EN 13501-1: 2018 Classification B-s1, d0 P Melting Point 250°C Max. Recommended Service Temp: Up to 80°C</p>
Thickness (mm)	Size mm	Weight kg														
9 mm	2400 x 1200	5.7kg														
18mm	2400 x 1200	11.4kg														
12mm	2800 x1200	8kg														
24mm	2800 x1200	16kg														
 <p>MIIXFELT™ ACOUSTIC RESULTS</p> <table border="1"> <thead> <tr> <th>Aw</th> <th>AS Coefficient @ 2000 Hz</th> <th>SAA (NRC)</th> </tr> </thead> <tbody> <tr> <td>Class E. 0.25 (50mm air gap)</td> <td>0.85 (0mm air gap)</td> <td>0.41 (0mm air gap)</td> </tr> <tr> <td>Class C. 0.65 (50mm air gap)</td> <td>1 (50mm air gap)</td> <td>0.76 (50mm air gap)</td> </tr> <tr> <td>Class A 0.90 (100mm air gap)</td> <td>1* (100mm air gap)</td> <td>0.87 (100mm air gap)</td> </tr> <tr> <td>Class A. 0.95 (200mm air gap)</td> <td>1 (200mm air gap)</td> <td>0.92 (200mm air gap)</td> </tr> </tbody> </table>		Aw	AS Coefficient @ 2000 Hz	SAA (NRC)	Class E. 0.25 (50mm air gap)	0.85 (0mm air gap)	0.41 (0mm air gap)	Class C. 0.65 (50mm air gap)	1 (50mm air gap)	0.76 (50mm air gap)	Class A 0.90 (100mm air gap)	1* (100mm air gap)	0.87 (100mm air gap)	Class A. 0.95 (200mm air gap)	1 (200mm air gap)	0.92 (200mm air gap)
Aw	AS Coefficient @ 2000 Hz	SAA (NRC)														
Class E. 0.25 (50mm air gap)	0.85 (0mm air gap)	0.41 (0mm air gap)														
Class C. 0.65 (50mm air gap)	1 (50mm air gap)	0.76 (50mm air gap)														
Class A 0.90 (100mm air gap)	1* (100mm air gap)	0.87 (100mm air gap)														
Class A. 0.95 (200mm air gap)	1 (200mm air gap)	0.92 (200mm air gap)														

For technical support or further advice, contact:
hello@lumii.design | +44 (0)1273 750 240



DISCLAIMER
This guide is provided in good faith to assist in installation. It is not intended as a complete or prescriptive method. Lumii Design accepts no responsibility for results due to variations in site conditions, handling or application. All health and safety standards must be observed.

