

Lumii PLANTERS

YORK



York, our largest planter, comes in widths of 1200mm to 2400mm in increments of 300mm (for each Vac Form recycled insert) and includes a powder-coated steel frame with optional gliders or castors for effortless placement and movement.

For technical support or further advice, contact:
hello@lumii.design | +44 (0)1273 750 240

lumii

DISCLAIMER


This guide is provided in good faith to assist in installation. It is not intended as a complete or prescriptive method. Lumii Design accepts no responsibility for results due to variations in site conditions, handling or application. All health and safety standards must be observed.

COLOURS

12mm & 24mm Miixfelt™



SCHEMATIC

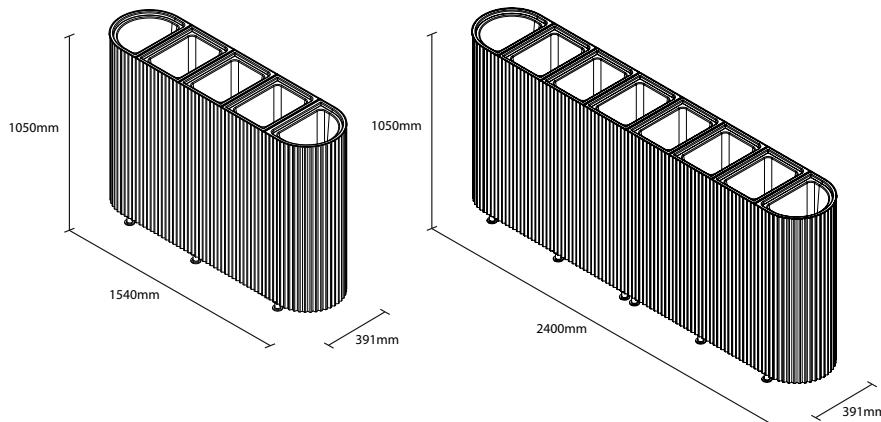

Each planter is filled with production off-cuts of shredded Miixfelt™, enhancing acoustic performance while championing Lumii's no-waste policy. Crafted from 12mm Miixfelt™ acoustic felt, these planters are available in 34 colors and various sizes, adding a bold design statement to any space while improving acoustics and promoting wellbeing.

Sustainably made with at least 75% recycled PET, Lumii planters are moisture-resistant, versatile, and designed to accommodate both living and artificial plants. They're the perfect solution for dividing spaces and fostering a deeper connection to nature.

SPECIFICATIONS

 COMPOSITION 100% PET (75% Post Consumer Recycled Waste, 25% Polyester Felt) Chemical Entity: Polyester Fibre from PET (Polyethylene Terephthalate).	 COLOURS 34 UK stocked/ 50 more Colours Available Lead times and MOQ's apply Light fastness: 6-7 Excellent	
 DIMENSIONS Size mm XL - L 1200mm x W 391mm x H 1050mm 70KG XXL - L 1540mm x W 391mm x H 1050mm 110KG	 FIRE & HEAT Fire retardant: EN 13501-1: 2018 Classification B-s1, d0 P Melting Point 250°C Max. Recommended Service Temp: Up to 80°C	
 MIIXFELT™ ACOUSTIC RESULTS Aw 0.5 (0mm air gap) Class D. 0.85 (50mm air gap) Class B. 1 (100mm air gap) Class A. 1 (200mm air gap)	AS Coefficient @ 2000 Hz 1 (0mm air gap) 1 (50mm air gap) 1 (100mm air gap) 1 (200mm air gap)	SAA (NRC) 0.7 (0mm air gap) 0.89 (50mm air gap) 0.94 (100mm air gap) 0.97 (200mm air gap)

For technical support or further advice, contact:
hello@lumii.design | +44 (0)1273 750 240

DISCLAIMER

This guide is provided in good faith to assist in installation. It is not intended as a complete or prescriptive method. Lumii Design accepts no responsibility for results due to variations in site conditions, handling or application. All health and safety standards must be observed.

 **MADE IN BRITAIN**®

