

Lumii PLANTERS

BIOTA



Biota introduces a sculptural edge with its angular delta form, housing three 300 mm plant pots in a compact yet striking design. A powder-coated steel top provides a refined finish and long-lasting durability.

For technical support or further advice, contact:
hello@lumii.design | +44 (0)1273 750 240


lumii

DISCLAIMER


This guide is provided in good faith to assist in installation. It is not intended as a complete or prescriptive method. Lumii Design accepts no responsibility for results due to variations in site conditions, handling or application. All health and safety standards must be observed.

COLOURS

12MM & 24MM Miixfelt™

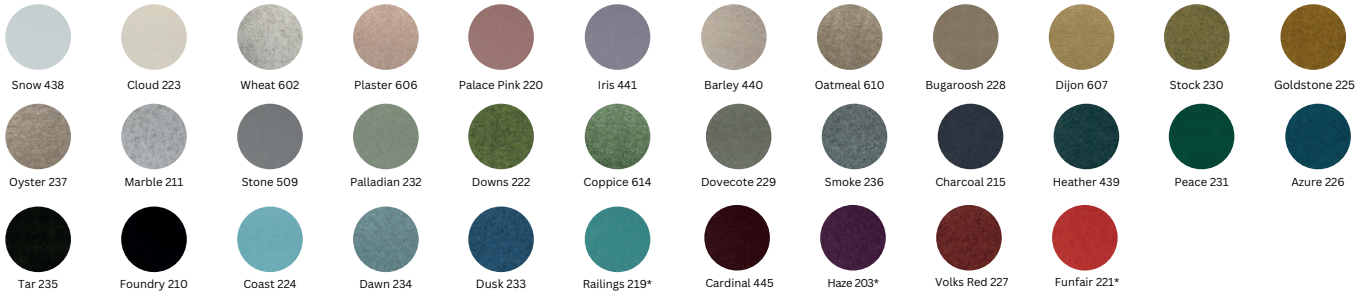

SCHEMATIC

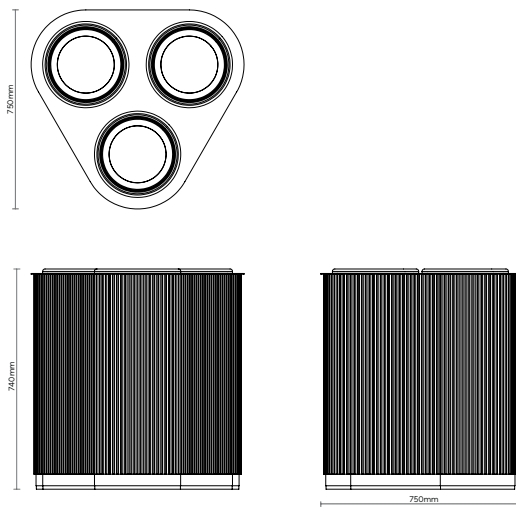

Each planter is filled with production off-cuts of shredded Miixfelt™, enhancing acoustic performance while championing Lumii's no-waste policy. Crafted from 12mm Miixfelt™ acoustic felt, these planters are available in 34 colors and various sizes, adding a bold design statement to any space while improving acoustics and promoting wellbeing.

Sustainably made with at least 75% recycled PET, Lumii planters are moisture-resistant, versatile, and designed to accommodate both living and artificial plants. They're the perfect solution for dividing spaces and fostering a deeper connection to nature.

SPECIFICATIONS



COMPOSITION

100% PET (75% Post Consumer Recycled Waste, 25% Polyester Felt)
Chemical Entity: Polyester Fibre from PET (Polyethylene Terephthalate).



COLOURS

34 UK stocked/ 50 more Colours Available
Lead times and MOQ's apply
Light fastness: 6-7 Excellent



DIMENSIONS

Size mm Weight kg
L 750mm x W 750mm x H740mm 28 kg



FIRE & HEAT

Fire retardant:
EN 13501-1: 2018 Classification B-s1, d0 P
Melting Point 250°C Max.
Recommended Service Temp: Up to 80°C



MIIXFELT™ ACOUSTIC RESULTS

Aw
0.5 (0mm air gap)
Class D. 0.85 (50mm air gap)
Class B. 1 (100mm air gap)
Class A. 1 (200mm air gap)

AS Coefficient @ 2000 Hz
1 (0mm air gap)
1 (50mm air gap)
1 (100mm air gap)
1 (200mm air gap)

SAA (NRC)
0.7 (0mm air gap)
0.89 (50mm air gap)
0.94 (100mm air gap)
0.97 (200mm air gap)

For technical support or further advice, contact:
hello@lumii.design | +44 (0)1273 750 240

lumii

DISCLAIMER

This guide is provided in good faith to assist in installation. It is not intended as a complete or prescriptive method. Lumii Design accepts no responsibility for results due to variations in site conditions, handling or application. All health and safety standards must be observed.

